

223mm Ductile Iron Wave Heelguard Grate 0.5m - Class D




Ductile Iron Wave Heelguard Grate

Certified to AS3996 load class D240kN, point load approximately 8,000kg.
Compliant for wheelchair & walking cane safety (AS1428.2 - Clause 9).
Compliant for bicycle tyre penetration resistance (AS3996 - Clause 3.3.6).
Compliant for surface openings in pedestrian areas (AS3996).
Certified for slip resistance Wet Pendulum Test (AS4586:P2).
Certified for slip resistance for oil-wet inclining platform test (AS4586:R10)

Intake area of 18,534mm² per half metre grate.
Manufactured from ductile iron with KTL coating.
Grates suitable for MEA Supreme LZ/AZ2000 channel units & inline sumps.
Total width of grate 223mm.

Locking Mechanism

Standard locking mechanism offers securement to channel units. Locking mechanism compatible with MEA Supreme/Access channel systems.

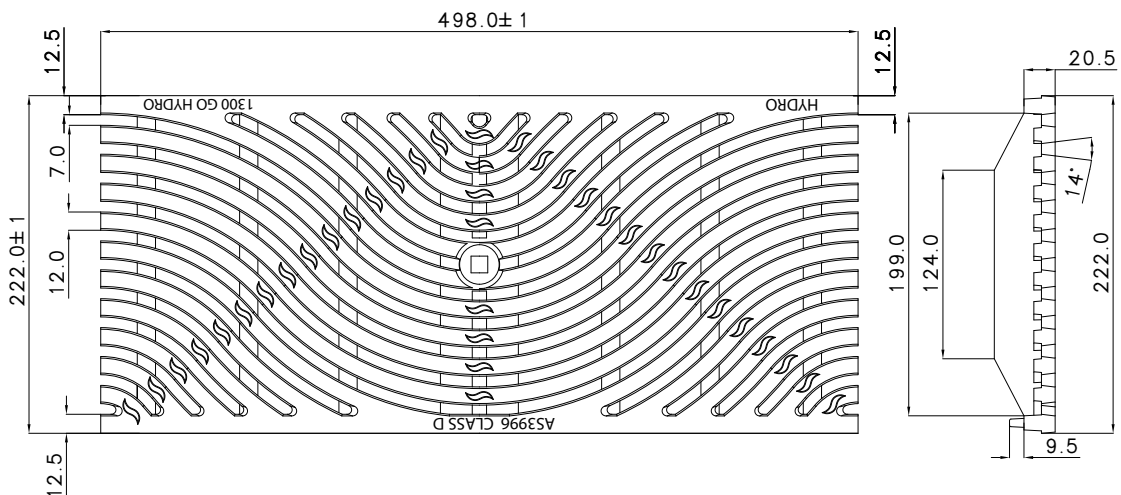

PRODUCT SPECIFICATION

DESCRIPTION	MATERIAL	LENGTH	PART NO.	WEIGHT (kg)
223mm Ductile Iron Wave Heelguard Grate 0.5m - Class D	Ductile Iron	498mm	152584/7	9.0
Standard locking mechanism for 200mm channels	Stainless Steel	N/A	161000	0.3