

223mm Ductile Iron Longitudinal Heelguard Grate - Class D CLIPFIX



Ductile Iron Longitudinal Heelguard Grate CLIPFIX


Certified to AS3996 load class D240kN, point load approximately 8,000kg.
Compliant for wheelchair & walking cane safety AS1428.2.
Compliant for bicycle tyre penetration AS3996.

Certified P3 slip resistance class for wet pendulum test AS4586-2013.
Certified R10 slip resistance class for oil-wet inclining platform test AS4586-2013.

Intake area of 31,752mm² per half metre grate.
Manufactured from ductile iron with KTL coating.
Grates suitable for MEA Supreme/Access AC/AZ/AS/LZ/LS & Mearin Plus 200mm clear opening channel units.
Total width of grate 223mm.

Locking Mechanism

CLIPFIX locking mechanism offers securement to channel units.

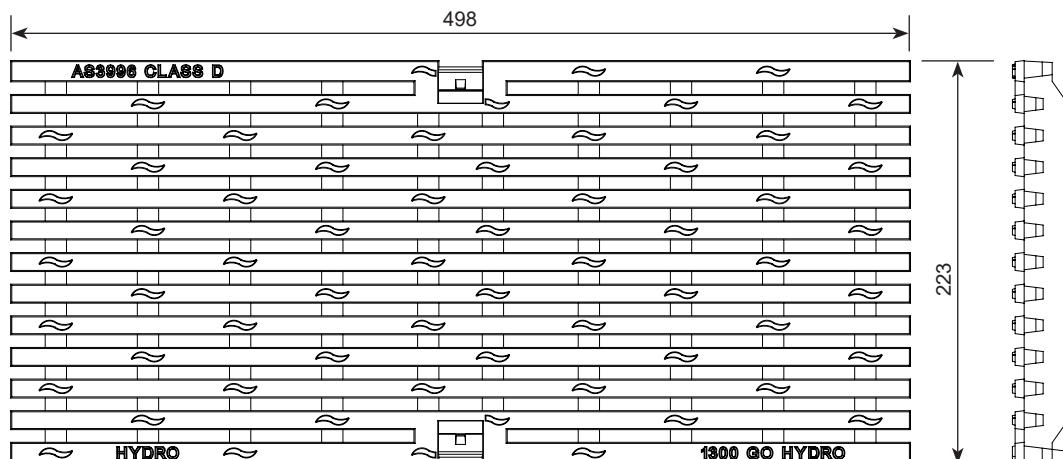

PRODUCT SPECIFICATION

DESCRIPTION	MATERIAL	LENGTH	PART NO.	WEIGHT (kg)
223mm Ductile Iron Longitudinal Heelguard Grate 0.5m Class D CLIPFIX	Ductile Iron	498mm	152801	10