

123mm Ductile Iron Slotted Grate 0.5m - Class G




Ductile Iron Slotted Grate

Certified to AS3996 load class G900kN, point load approximately 30,000kg.
Compliant for wheelchair & walking cane safety (AS1428.2 - Clause 9).
Compliant for bicycle tyre penetration resistance (AS3996 - Clause 3.3.6).

Intake area of 22,126mm² per half metre grate.
Manufactured from ductile iron with KTL coating.
Grates suitable for MEA Supreme C1000 channel units & inline sumps.
Total width of grate 123mm.

Locking Mechanism

4 point bolt locking system offers securement to channel units & inline sumps.

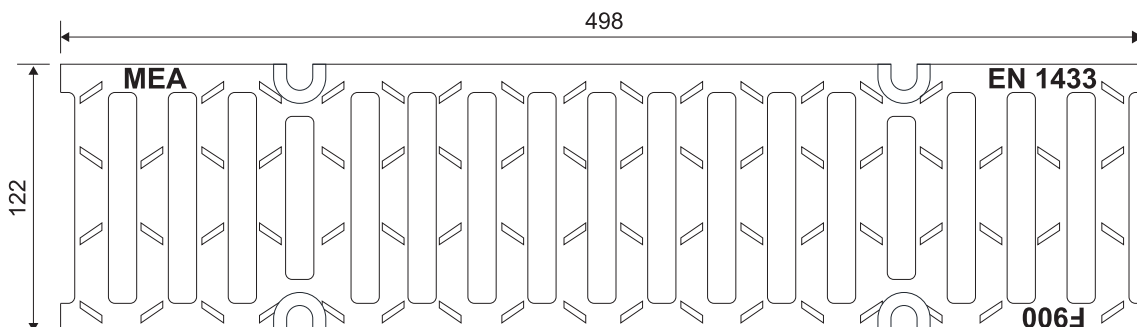

PRODUCT SPECIFICATION

DESCRIPTION	MATERIAL	LENGTH	PART NO.	WEIGHT (kg)
123mm Ductile Iron Slotted Grate 0.5m - Class G	Ductile Iron	498mm	153094	6.5
4 Point Locking Bolts (8 bolts per pack = 1 metre)	Stainless Steel	N/A	153050	N/A