


223mm Ductile Iron Slotted Grate 0.5m - Class G PROFIX

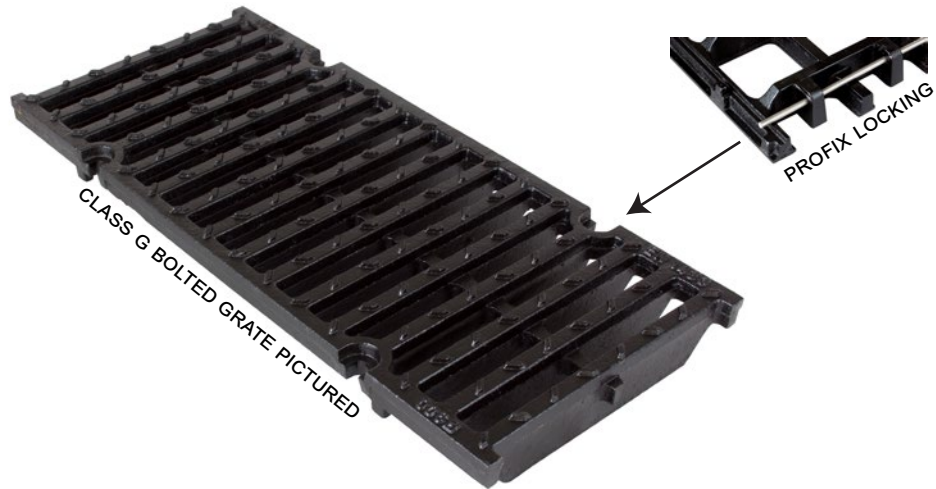


Ductile Iron Slotted Grate

Certified to AS3996 load class G900kN, point load approximately 30,000kg.
Compliant for wheelchair & walking cane safety (AS1428.2 - Clause 9).
Compliant for bicycle tyre penetration resistance (AS3996 - Clause 3.3.6).

Intake area of 49,919mm² per half metre grate.
Manufactured from ductile iron with KTL coating.
Grates suitable for MEA Supreme AC/C2000 channel units & inline sumps & 200 CIF frames.
Total width of grate 223mm.

Locking Mechanism

Integrated MEA Profix locking system ensures grate cannot move once installation into the channel is completed. Profix has no moving parts, and guarantees long term functionality under extreme conditions.

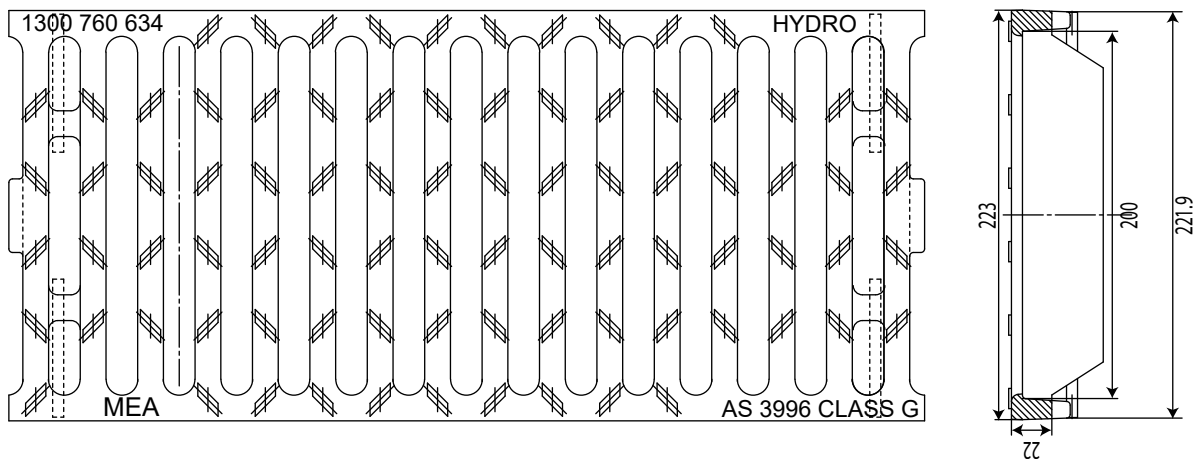

PRODUCT SPECIFICATION

DESCRIPTION	MATERIAL	LENGTH	PART NO.	WEIGHT (kg)
223mm Ductile Iron Slotted Grate 0.5m - Class G PROFIX	Ductile Iron	498mm	154239	11.6