


## 322mm Ductile Iron Hi-Flow Grate 0.5m - Class D PROFIX

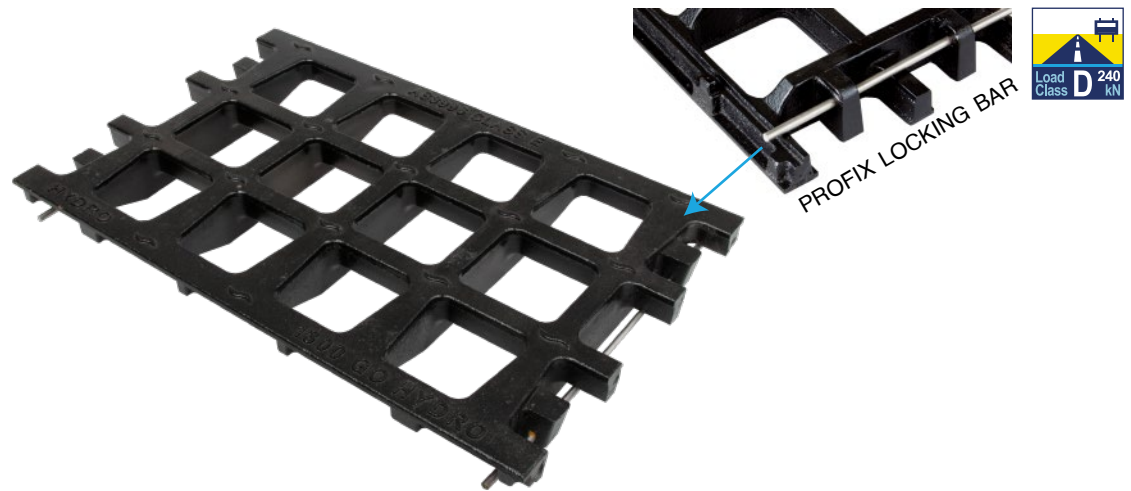


### Ductile Iron Hi Flow Grate

Certified to AS3996 load class D240kN, point load approximately 8,000kg.  
Large holes maximize water intake and minimizes ponding.  
Fast removal of water from road surfaces.  
Anti-shunt lugs ensures grate won't move horizontally in channel edge rail.

Intake area of 83,000mm<sup>2</sup> per half metre grate.  
Manufactured from ductile iron with KTL coating.  
Grates suitable for MEA Supreme LC/AC/C3000 channel units & inline sumps.  
Total width of grate 322mm.

### Locking Mechanism

Integrated MEA Profix locking system ensures grate cannot move once installation into the channel is completed. Profix has no moving parts, and guarantees long term functionality under extreme conditions.

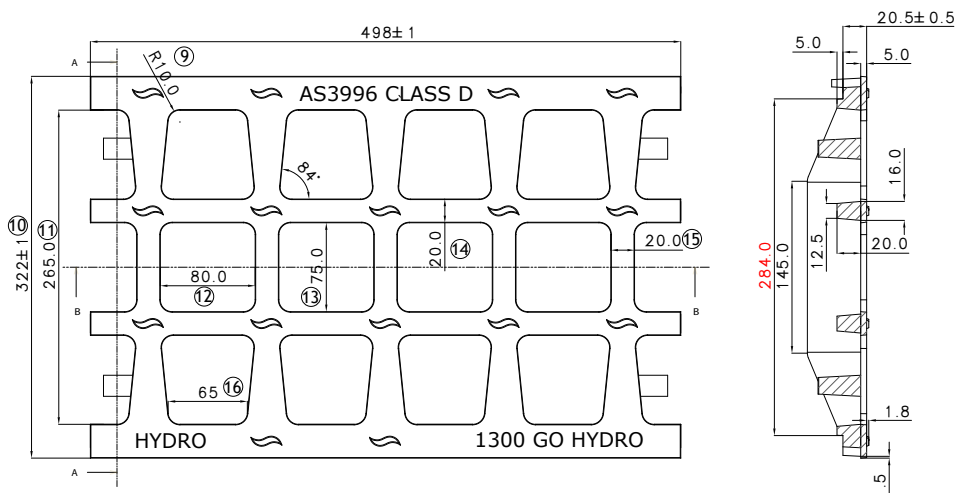

### PRODUCT SPECIFICATION

DESCRIPTION	MATERIAL	LENGTH	PART NO.	WEIGHT (kg)
322mm Ductile Iron Hi-Flow Grate 0.5m - Class D PROFIX	Ductile Iron	499mm	723300	12.0